
## Revo<sub>"</sub>Tile"

REAL BEAUTY. REAL PORCELAIN. REAL FAST.

Easily install the perfect floor with beautiful porcelain tile that is **waterproof, stainproof, scratch-resistant, dentproof, fire-resistant, and easy to clean.** 

The simple installation process allows installers of LVT and Laminate to complete renovations that utilize RevoTile, providing a broader labor pool at a time when finding qualified tile installers has become increasingly challenging. In fact, the system is so easy-to-install, any DIY customer can do it.

When used in conjunction with approved RapidGrout and RapidPrep underlayment, RevoTile is backed by a Limited Lifetime Residential Warranty. Also, since mortar isn't used, as the homeowner's style preferences change over time, **RevoTile makes updating to new flooring designs in the future much easier.** 

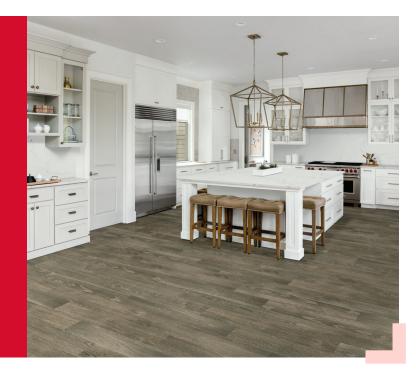

## INSTALL IN **3 EASY** STEPS...



PREP Place underlayment, No Mortar Required CLICK Click tiles together

GROUT Grout Immediately, No wait time

| <b>WOOD LOOK</b> - 6 x 24   | STONE LOOK - 6 x 24 | <b>MARBLE LOOK</b> - 6 x 24, 12 x 24  |
|---|---------------------|---|
| ANTIQUITY MISSION ELM COLDENHUR   |                     | CARRARA<br>CARRARA<br>CALACATTA<br>CALACATTA<br>CALACATTA<br>CALACATTA<br>CALACATTA<br>CALACATTA<br>CALACATTA   |
| WHITE RV75 RV73 RV71   Image: SPICED WALNUT RV73 PERSPECTIVE GREY RV70 TOASTED BROWN RV74 | RV60 RV62 RV64      | WHITE RV50   MARBLE QC01   GREY RV51     Image: Constraint of the second sec |

A revolutionary new porcelain floor tile system provides all the advantages of porcelain tile but installs over two times faster.

- No acclimation time is required before installation. Quick installing underlayment replaces mortar, eliminating setting time. Just click tiles together and then grout immediately.
- Installs directly over most existing flooring types, reducing labor costs and mess.

## **PRODUCT FEATURES**

- Once grouted and the perimeter is sealed, RevoTile is a waterproof flooring system.
- Allows plank and rectangular tiles to be installed at a 33% and even 50% offset with consistent alignment and no lippage (please avoid straight-joint installation).
- Achieves breaking strength that meets or exceeds 475 lbs and increased impact resistance.
- Reduces sound transmission, making it perfect for basements, multi-level structures and multi-family properties.
- RevoTile is Made in the USA using imported materials (click system is imported; tile is made in USA and system is assembled in USA).

Contact Amy McMacken for more details! Email: Amy.McMacken@daltile.com Cell: 734.218.4995

